



## Repairing LG VX5200 Rear body panel

### Tools used in this guide

- [Fingers](#)
- [Phillips #00 Screwdriver](#)
- [Plastic Opening Tools](#)
- [Thumb Tack](#)



### Step 1 - Battery

- Turn the phone on its back.



### Step 2

- Orient the phone as shown.
- Remove the battery cover by pushing upward with your thumb.




### Step 3

- Place your fingernail at the top of the battery and pry the battery out towards you.






### Step 4 - Rear body panel

- Orient the phone as shown with the battery already removed.




### Step 5

- Remove the 2 plastic plugs located on the side and upper quadrant of the rear body panel by using the push-pin and lifting outwards.
- Use a Phillips #00 screwdriver to remove the 5 screws as shown here.

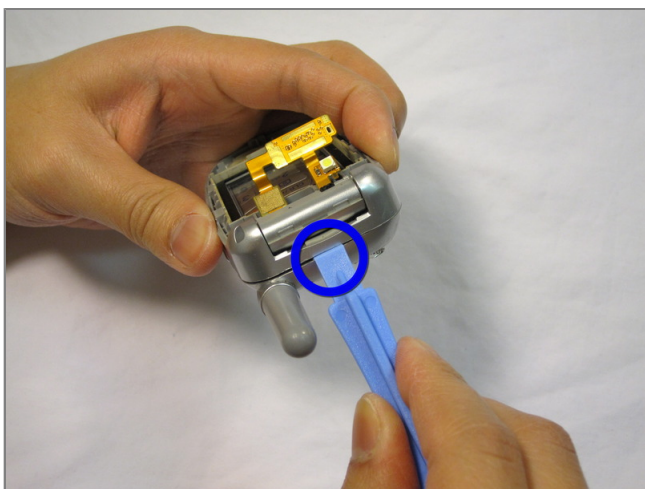

### Step 6

- Place an iPod opener tool in the seam above the antenna.
- Run the tool around the perimeter of the entire phone.

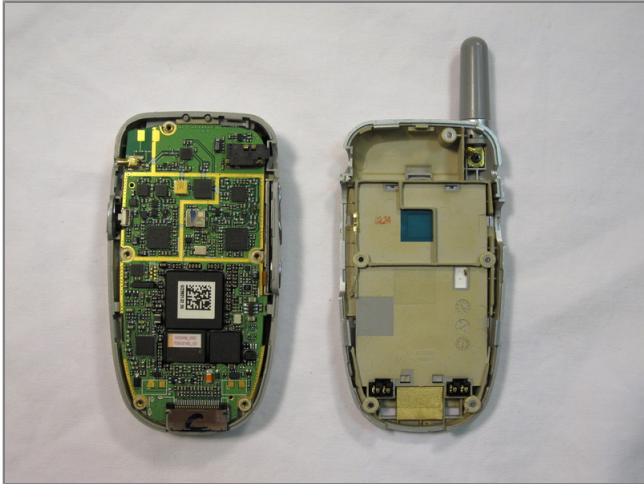

### ***Step 7***

- Check to see that your device looks like the attached photo.